




# Paving Solutions

Innovative and Cost-Effective  
Engineered Materials for  
Paving Roadways



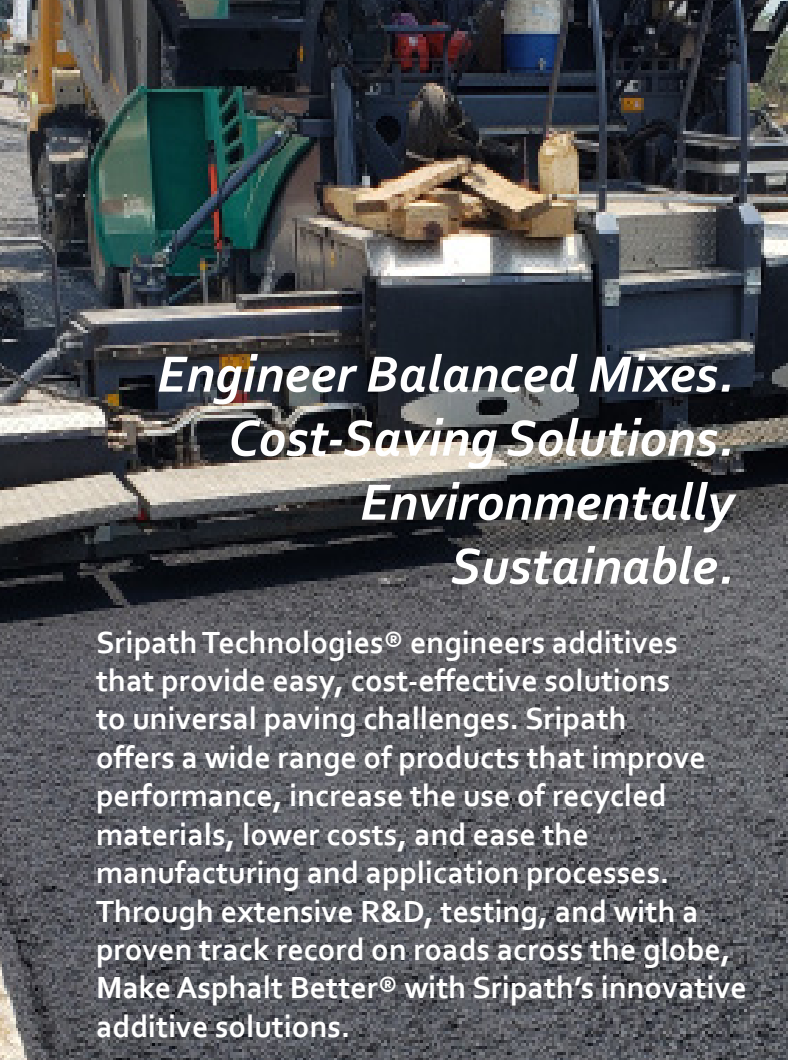

***Engineer Balanced Mixes.  
Cost-Saving Solutions.  
Environmentally  
Sustainable.***

Sripath Technologies® engineers additives that provide easy, cost-effective solutions to universal paving challenges. Sripath offers a wide range of products that improve performance, increase the use of recycled materials, lower costs, and ease the manufacturing and application processes. Through extensive R&D, testing, and with a proven track record on roads across the globe, **Make Asphalt Better®** with Sripath's innovative additive solutions.

# ReLIXER®

## Rejuvenator / Recycling Agent

- *Rejuvenate aged bitumen in reclaimed asphalt (RAP/RAS)*
- *Restore functional performance of aged binder*
- *Use up to 100% RAP in mixes*
- *Reduce virgin asphalt needs*
- *Keep RAP out of landfills*
- *Compatible with bitumens world-wide*
- *No VOC - supports worker safety*

## Paving Solutions

# PHALANX®

## Warm Mix Additive

- *Reduce paving compaction temperature*
- *Improve compactibility even at lower temperatures*
- *Improve wettability*
- *Aid in better coating of aggregates*
- *Reduce mix production temperature*
- *Reduce overall energy consumption*
- *Lower carbon footprint*

# SriCote®

## Anti-Stripping Agent

- *Promote aggregate bonding*
- *Highly effective and efficient anti-stripping agent*
- *Amine-free*
- *Exceptional dosage efficiency*
- *Improve Tensile Strength Ratio*
- *Does not affect Performance Grade properties*
- *Compatible with all bitumens and a wide range of PMAs*

*Improve High Temperature Performance with...*

# PGXpand<sup>®</sup>

## Bitumen Friendly Polymer

- *Dramatic improvement of high temperature properties and Softening Point*
- *Highly effective at low dosages*
- *Exceptional rutting resistance*
- *Lower viscosity*
- *Better workability*
- *Easy low shear incorporation*
- *Maintain low temperature properties*

## Make Asphalt Better

*Improve Low Temperature Performance with...*

# ReNUBIT<sup>®</sup>

## Bitumen Softener

- *Petrochemical oil blend*
- *Improve crumb rubber and polymer compatibility*
- *Improve low temperature properties*
- *Highly compatible with all bitumens worldwide*
- *Stable at storage, use and mix temperatures*
- *Effective "cutter" for viscosity*

# NuMIXER<sup>®</sup>

## Bitumen Softener

- *All natural, "green", bio-oil*
- *Improve low Performance Grade and penetration properties*
- *Improve polymer and crumb rubber compatibility*
- *Lower viscosity of formulations*
- *Excellent aging properties*
- *Stable at storage, use and mix temperatures*





# Additive Solutions for Every Challenge



## SRIPATH®

Group of Companies

Proudly serving our customers around the globe.



**SRIPATH®**  
TECHNOLOGIES

[Sripath.com](https://Sripath.com)  
Americas & Africa



**SRIPATH®**  
ASIA-PAC

[Sripathapc.com](https://Sripathapc.com)  
Australia, New Zealand,  
& Asia-Pacific Region



**SRIPATH®**  
INNOVATIONS

[SripathInnovations.com](https://SripathInnovations.com)  
United Kingdom, European Union,  
& Middle East



**BITPATH®**

[Bitpath.co.in](https://Bitpath.co.in)  
India

COPYRIGHTS: ©-2025 Sripath Technologies®, LLC

TRADEMARKS: Sripath®, Sripath Technologies®, the Sripath Technologies Logo®, ReLIXER®, PGXpand®, PGXtend®, NuMIXER®, ReNUBIT®, SriCote®, KoolTEQ™, PHALANX®, Bitpath®, the Bitpath Logo®, Sripath Asia-Pac®, the Sripath Asia-Pac Logo®, Sripath Innovations®, the Sripath Innovations Logo®, ReJUVN8™, ReGENR8™, Make Asphalt Better®, Make Bitumen Better®, Pioneering Sustainable Roadways®, Bitumen Pathways for the Future®, and the Rocky Asphalt™ and Sandy Asphalt™ Mascots are trademarks and/or service marks of Jay Holding Inc. and/or its affiliates in the United States of America and/or in other countries. All Rights Reserved.

DISCLAIMER: Although all statements and information contained herein are believed to be accurate and reliable, they are presented without guarantee or warranty of any kind, express or implied. Information provided herein does not relieve the recipient or user from the responsibility of carrying out own tests, experiments, and validation. The recipient or user assumes all risks and liability for use of the information and results obtained. Statements or suggestions concerning the use of materials and processes are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all toxicity data and safety measures are indicated herein or that other measures may not be required.